Mobile

Steri-Light UV-C Desinfection and sanitizer

Steri-Light
UV-C 200
Mobile Sterilizer

⚠CAUTION

CE   RoHS

Steri-Light Cheap mobile UV-C Sterilizer

Technical data

Wattage	50w	100w	150w	200w
Limiting altitude		1.5m		
Horizontal rotation		X-360°		
Vertical rotation		Y-180°		
Size		500x300x1030mm		

Feature

- Spectral Wavelength: 200-280nm
- Mobile & Single Placement
- Motion Sensor Protection
- Flexible Target Disinfection Area
- Easy to transport and store

Steri-Light UV-C 200 Mobile Sterilizer

Applications

Office	School/Classroom	Stadium	Supermarket	Laundry	Hospital

Subway	Ambulance	Station	Airport	Warehouse	Factory

## Ultraviolet C: The Truly Effective Purification Wavelength 200-280nm.

UVC true ultraviolet short wave sterilization, no ozone, no mercury.

UVA and UVB

The lower spectrum wavelength of regular UV light . Not adequate and incapable for bacilli eradication.

UV Tube

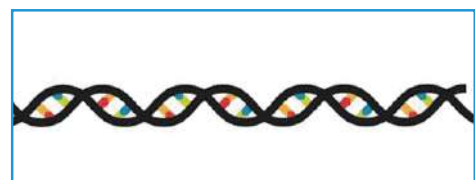Heavy concentrations of High Ozone and potential leaked Mercury are extremely harmful to humans

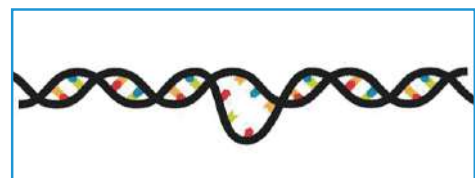"A mobile UV sterilizer is equivalent to 30pcs conventional UV tube."

Steri-Light
UV-C 200
Mobile Sterilizer

>

Before Irradiation

After Irradiation

HOW UVC WORKS?

UVC radiation is known to break the DNA of bacteria, viruses and spores. As a result, they are rendered harmless.

Feature

Unlock the box

Steri-Light UV-C 200 Mobile Sterilizer

Rising the pole
Maximum height 1.5m

480mm

Adjust to target direction

Step on to brake

Adjust the modules for a 360° full coverage

Toolless rotatable 200° available
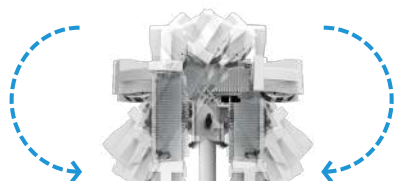
Loose the screw to adjust, 180° available

* After disinfection, restore to original state, and store at -10-50℃, 0-90% humidity

Ergonomics Design

Draw-bar handle,
as simple as your traveling case.

Work pattern
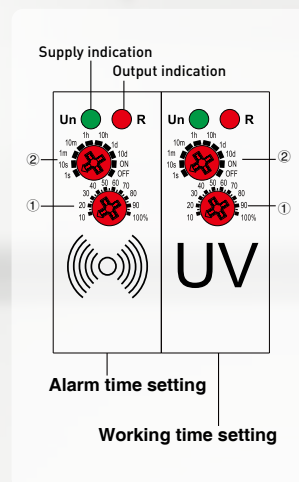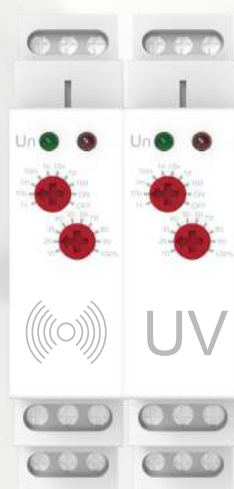

1. Switch the light on, start with 10 seconds alarm, please leave immediately!

start working, and automatically turned off after 4 hours (optional).

Setting purification time

Supply indication
Output indication

Un • • R   Un • • R

Alarm time setting

Working time setting

Please rotate ② to set timming, and rotate ① to set the timming percentage.
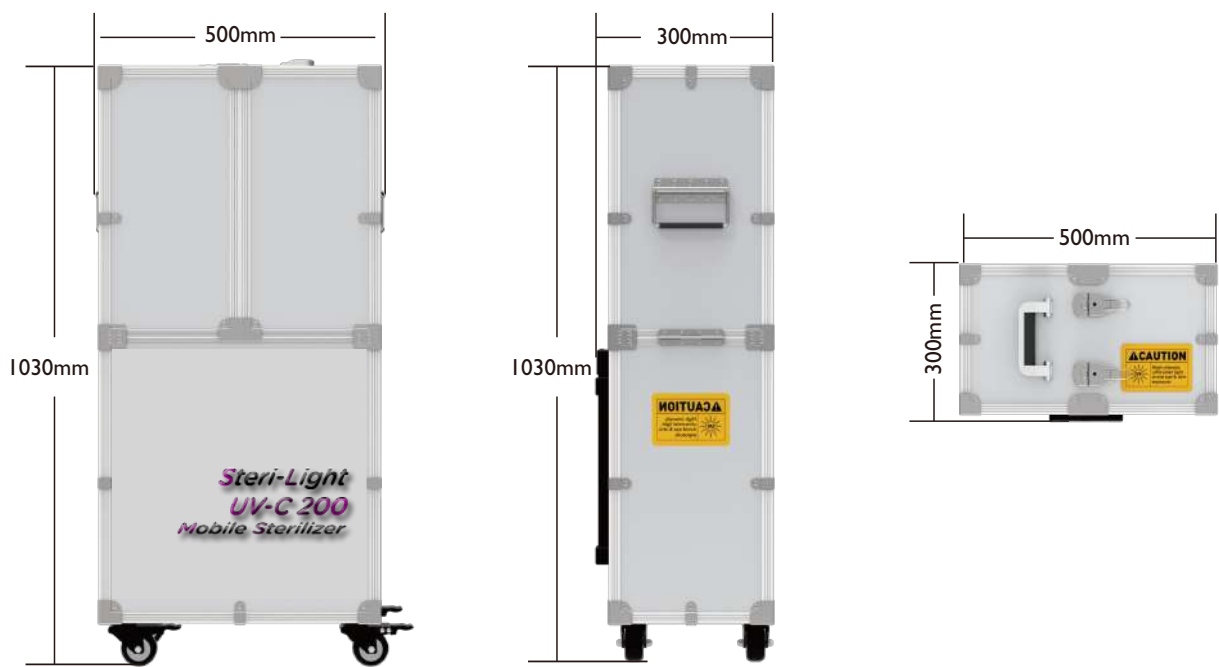For example: set the time to 4 hours, please rotate ② to "10h" and ① to 40%.

Sensor

360° detection
When a person is detected,
the light turns off automatically.
Then automatically switched on by absence.

Packaging and Size

* This dimension is available to put into regular trunk.

Wattage	Weight	Size	Gross Weight of Carton	Size of Carton	PCS /Carton
50w	17.60kg ± 5%	500x300x1030mm	31.00kg ± 5%	530x360x1080mm	1
100w	17.65kg ± 5%	500x300x1030mm	31.05kg ± 5%	530x360x1080mm	1
150w	17.85kg ± 5%	500x300x1030mm	31.25kg ± 5%	530x360x1080mm	1
200w	18.00kg ± 5%	500x300x1030mm	31.50kg ± 5%	530x360x1080mm	1